


The HJ **Excavator** is designed to dig either in forward or reverse.

Dual cutting edges include one serrated and one smooth to tackle tough jobs or delicate work. The serrated cutting edge makes short work of digging in hard soils and is great for serious excavating. The smooth cutting edge is great for sod removal and peeling to a desired depth.

Its innovative flip back design allows for forward or reverse excavating.

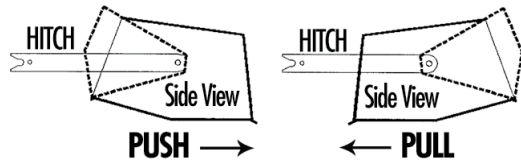

Standard Features:

- Hydraulic Control
- Push or Pull Digging
- Ventrac Mount System

Optional Feature:

- Rear mounting with 3-Point Hitch and 3-N-1 adapter



Specifications

Excavator HJ300/480

3000 series
4000 series

	HJ300	HJ480
Stock Code	39.55236	39.55230
Hydraulically Controlled	Standard	Standard
Working Width (in.)	30 inches (76 cm)	48 inches (122 cm)
Bucket Capacity	3.6 ft ³ (.1 m ³)	5 ft ³ (.14 m ³)
Ground Clearance in raised Position	11"	11"
Ground Clearance in dumped Position	Varies*	Varies*

Dimensions:

Length	34 inches (86 cm)	34 inches (86 cm)
Width	34.5 inches (87.6 cm)	53.5 inches (136 cm)
Height	13 inches (33 cm)	13 inches (33 cm)
Weight	145 lbs (66 kgs)	180 lbs (82 kgs)
Shipping Weight	192 lbs (87 kgs)	256 lbs (116 kgs)
Shipping Dimensions	38.5 x 37 x 22 inches (98 x 94 x 56 cm)	57 x 37 x 22 inches (145 x 94 x 56 cm)

* Clearance varies according to which hole cylinder is mounted
All specifications subject to change without notice or obligation



328 East Water St • PO Box 148 • Orrville, OH 44667
330.683.0075 • 1.866.VENTRAC
Fax: 330.683.0000
www.ventrac.com • info@ventrac.com